

546601 StrongLumio RF dálkový ovladač/stmívač 12V/24V 1 zóna

RF diaľkový ovládač/stmievač, 1 zóna

RF pilot zdalnego sterowania/ściemniacz, 1 strefa

RF Télécommande / variateur, 1 zone

RF Remote control/dimmer, 1 zone

RF távirányító/dimmer, 1 zóna




Product description

2.4G full-touch dimmer can realize LED dimmer control of graded dimmer. With touch control mode, the user can adjust the lighting to the appropriate brightness at a long distance according to the actual needs. 2.4G remote control frequency, the remote control effect is stable, strong anti-interference ability.

Parameters

- Operating temperature: -20~55°C
- Supply voltage: DC12V~24V
- Controller power source: 3 V cell battery CR2025
- Wireless communication: 2,4 GHz, range 20-30 m
- Output: max 4 ch
- Standby power: <1W
- Output current: <6 A/ch, total max 15 A
- Max output power: 12V:<180W; 24V:<360W

Connection description

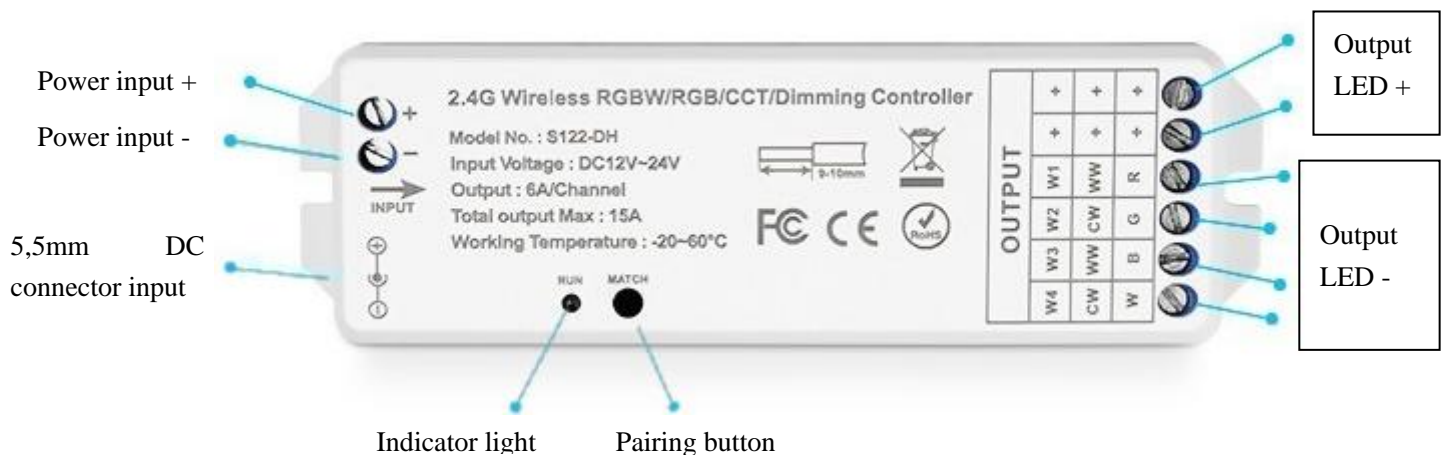

Pairing using the match button:

Short press the match key on the receiver, the indicator light is on and flashing. At this time, long press the "ON" key on the remote control, the indicator light will slowly blink 3 times means match is successful. **This will make the receiver linked to the remote and not responding to other remotes within range.**

Short press the match key on the receiver, the indicator light is on and flashing, At this time, long press the "ON" key on the remote control, the indicator light will quickly blink 5 times means the matched remotes were deleted. **This will make the receiver open to be controlled by any remote within range.**

Use power restart match (same result):

Switch off the power on the receiver for 1-2 seconds, then switch on power for 1-2 seconds, repeat again, the indicator light is on and flashing. At this time, long press the "ON" key on the remote control, the indicator light will slowly blink 3 times means match is successful.

Switch off the power on the receiver for 1-2 seconds, then switch on power for 1-2 seconds, repeat again, the indicator light is on and flashing. At this time, long press the "ON" key on the remote control, the indicator light will quickly blink 5 times means the matched remotes were deleted.

Delete all matched remote controls:

Long press the matching key 5 seconds, the indicator flash 9 times, that all the matching remote controls were deleted.

Attention:

1. Connect the load line first, then the power line. Make sure there is no short circuit between the connecting lines before power-on.
2. The product supply voltage is DC12~24V. Do not connect it to other voltages
3. Do not open or perform any operation than described in this manual.
4. Please mind the correct polarity.
5. Please note the maximum load of an individual controller. Exceeding this maximum will result in damaging the controller.

Producer: Démos trade, a.s.
Škrobálkova 630/13
718 00 Ostrava-Kunčičky
Czech Republic

